


Class 700

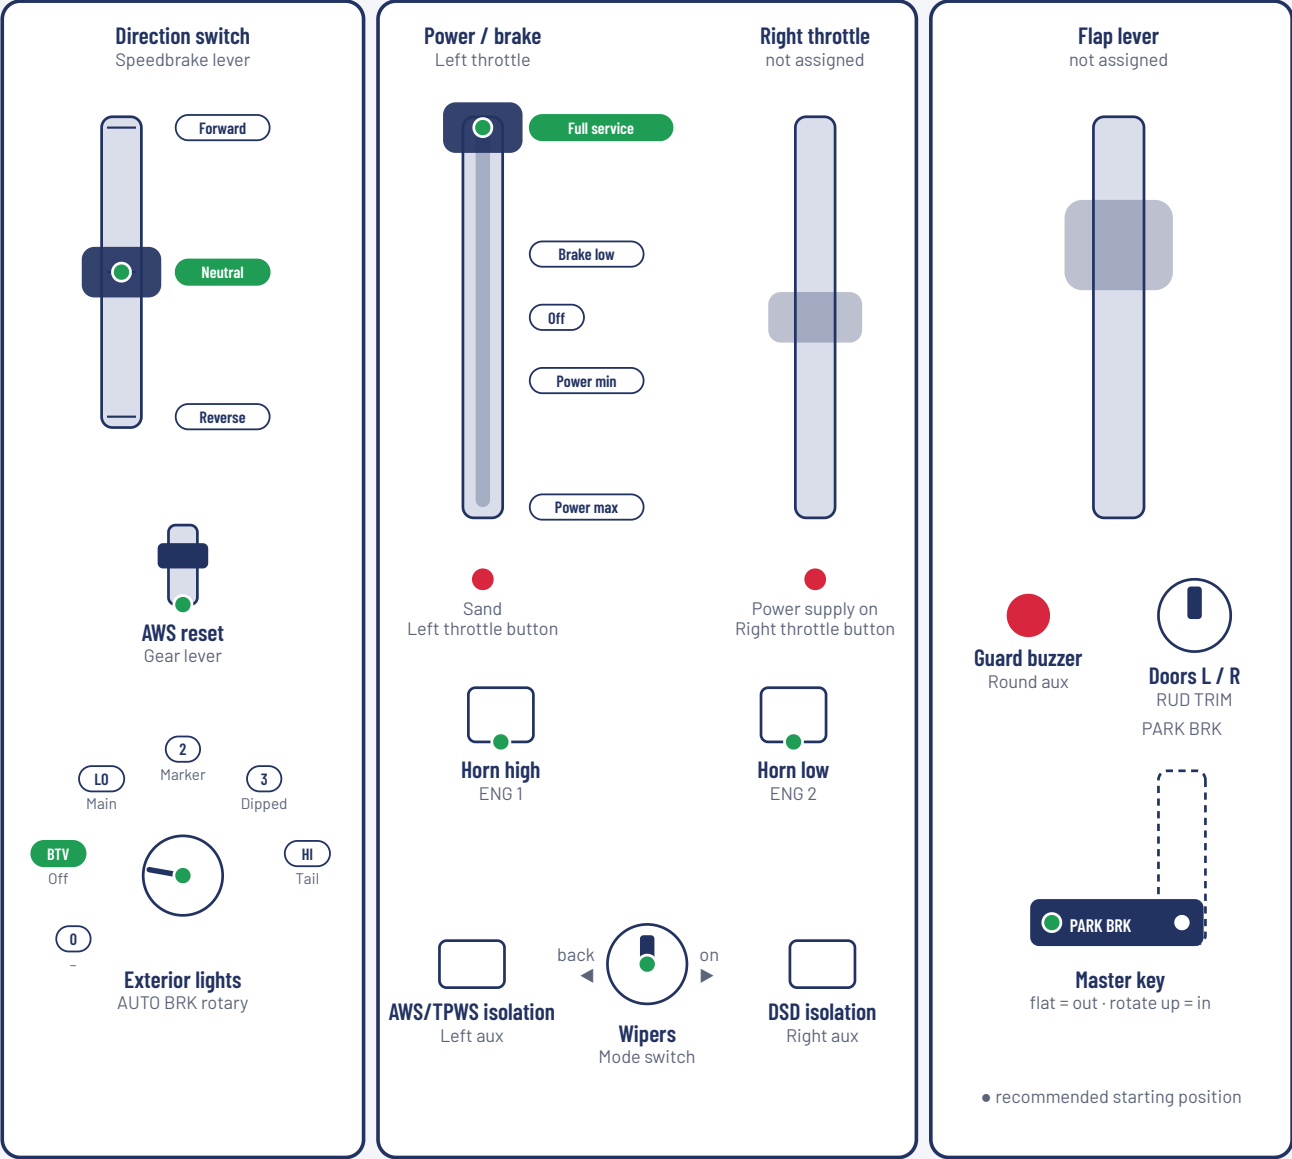

Cab setup

- Master key in (PARK BRK), battery on in the cab
- Power supply on (right throttle button), wait for line volts
- Direction switch to Neutral
- Check AWS/TPWS and DSD isolation lights are out
- Exterior lights to Main
- Open doors (RUD TRIM)

Cleared to depart

- Close doors, wait for the guard buzzer
- Check the signal
- Direction switch to Forward
- Handle from Full service through Off to Power min
- Pull further into the power zone as speed rises
- Acknowledge AWS with the gear lever

